
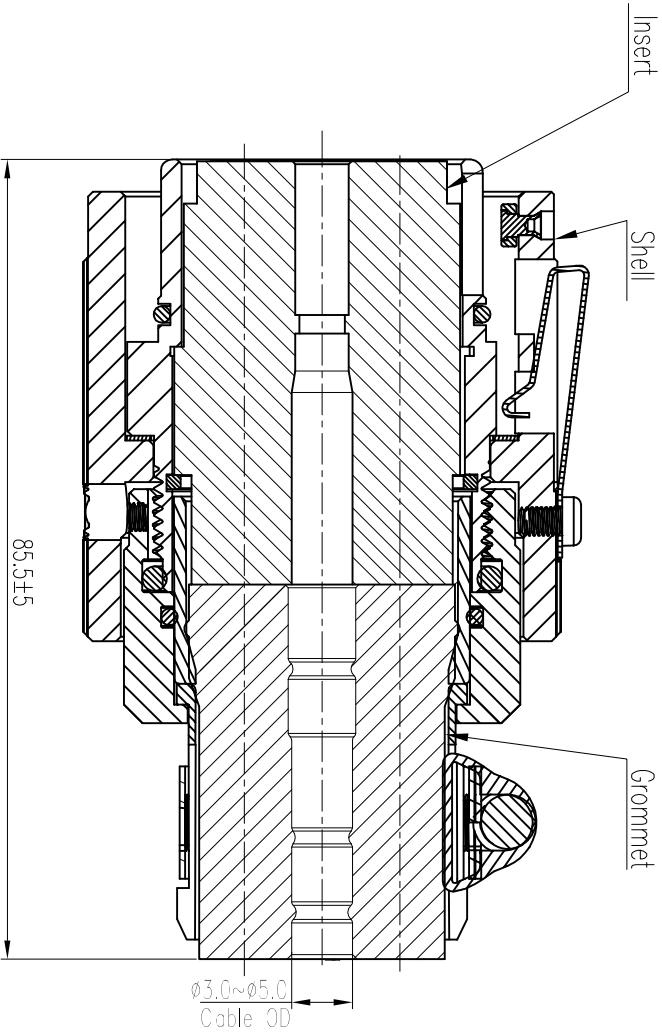


Amphenol PCD SZ  
ORIGINAL  
PDF Format  
13 Jul. 16R&D

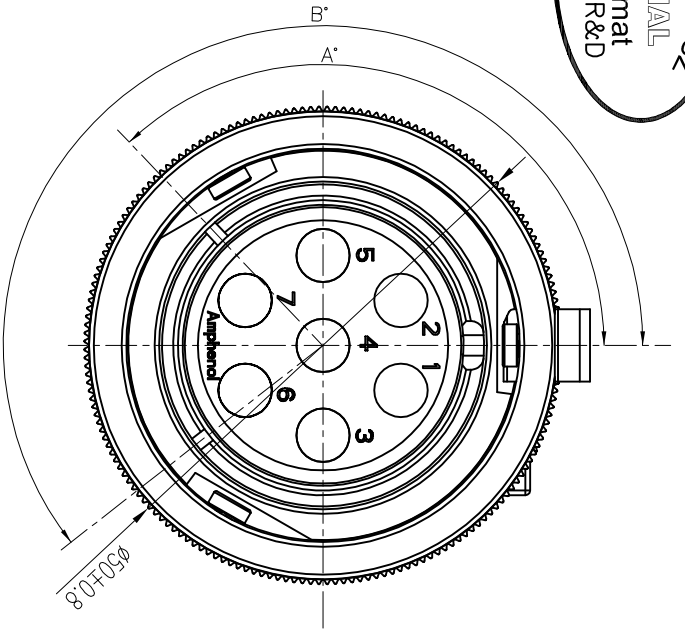

**\*Notes/技术参数:**

Material 材料 \ Finish 表面处理

Shells 外壳 : Aluminum alloy 铝合金 / Olive drab zinc plated 镀绿锌

Insert 插芯: Thermoplastics 热塑性材料

Fire retardant 阻燃等级: BS6853, UL94-V0

Contact 插针: 7x #12 Socket contacts (2.5~4mm\*2) 7根母针, 2.5~4mm\*2

(插针需要单独购买)  
Copper alloy 铜合金/Silver plated crimp type 镀银, 压接式

Grommet 密封橡胶: Silicone Rubber 硅胶

**Mechanical data 机械参数**

Operating Temperature 温度范围: -55°C ~ +125°C

IP-Class 防水等级: IP67

Durability 机械寿命: 1000 cycles

**Electrical data 电气参数:**

Rated Voltage 额定电压: 500V AC (R.M.S)

Withstanding Voltage 耐压强度: 3000V AC

Insulation Resistance 绝缘阻抗: 5000 MΩ Min

Contact Resistance 接触电阻: Less than 1.3 milliohms

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M UNITS: MM	X ± 0.5 XX ±0.10	
QW/ R/E	ANGLES ±0.5°	

ORIGINAL FOR CUSTOMER DISTRIBUTION	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN
CHND	AMPHENOL PCD SHENZHEN
APPD	

SIZE A3	DWG NO. ASGTC-6L-2407-SC-LF-LC-X	REV 1
SCALE 1.5:1	SHEET 1 OF 1	

**产品型号:**

ASGTC-6L-2407-SC-LF-LC-Z	Z 键位	135°	300°
ASGTC-6L-2407-SC-LF-LC-Y	Y 键位	135°	270°
ASGTC-6L-2407-SC-LF-LC-X	X 键位	135°	240°
ASGTC-6L-2407-SC-LF-LC-W	W 键位	135°	210°
ASGTC-6L-2407-SC-LF-LC-N	标准\无键位	115°	245°
P/N	键位	键位角度 A	键位角度 B

**ASGTC24-07 PLUG/插头**