


Amphenol PCD SZ
ORIGINAL
PDF Format
R&D

安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen


受控文件

2024年4月12日


REV	ECN	DESCRIPTION	DATE	MODIFIED
1		PRE- RELEASE	Jan-27-24	
2	R7918-2	Dimensional tolerance adjustment	Apr-10-24	

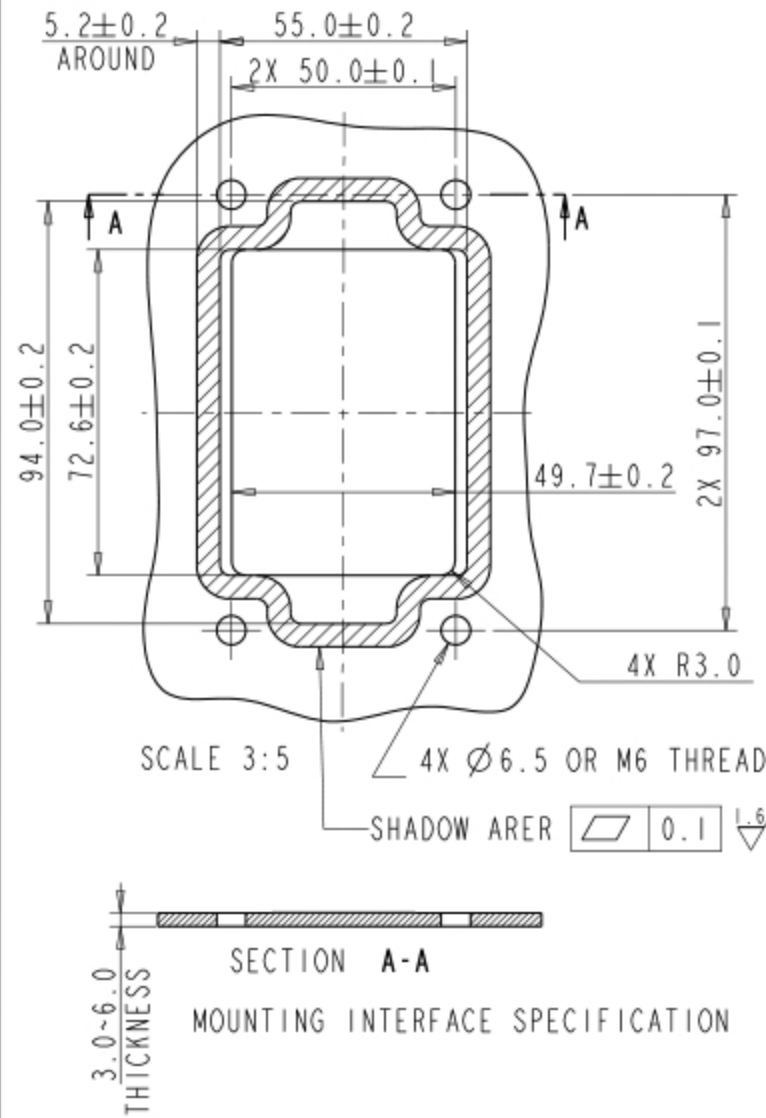

NUT TYPE

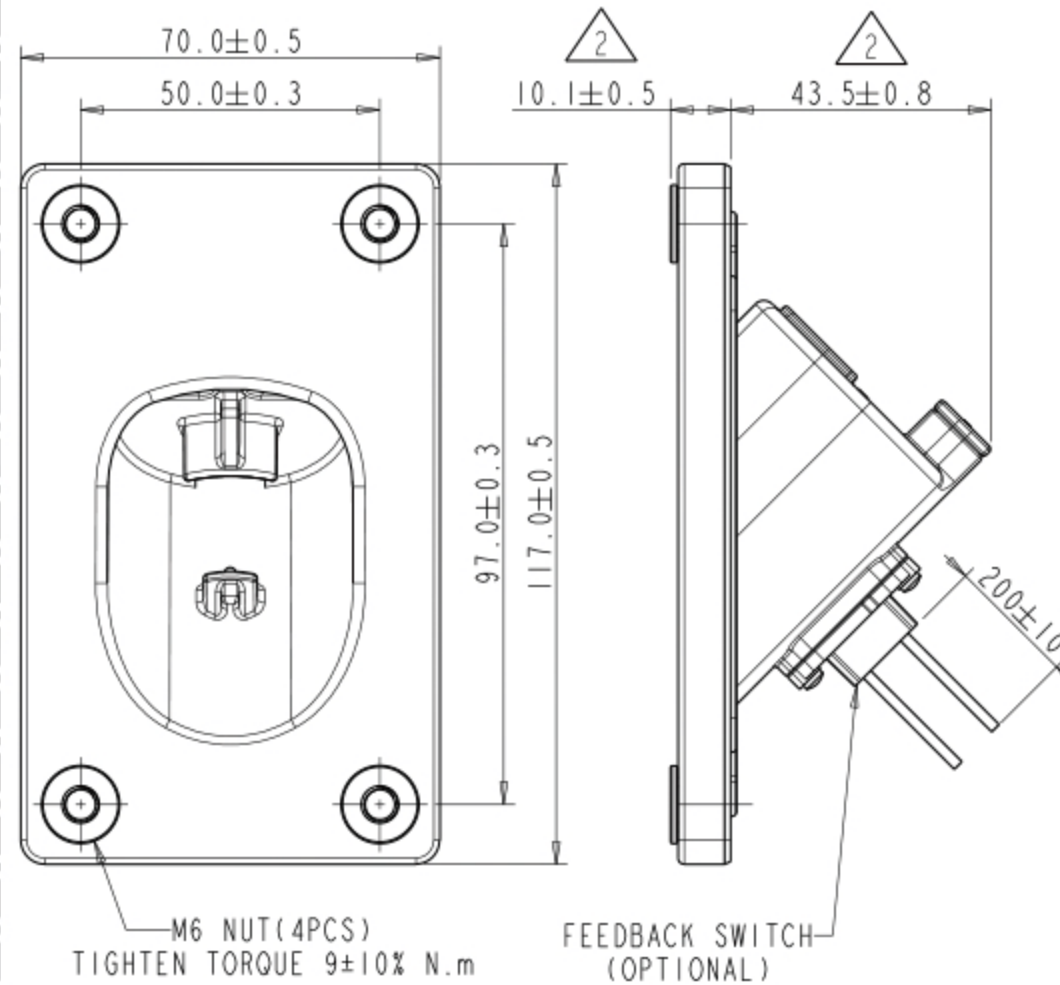

SLEEVE TYPE

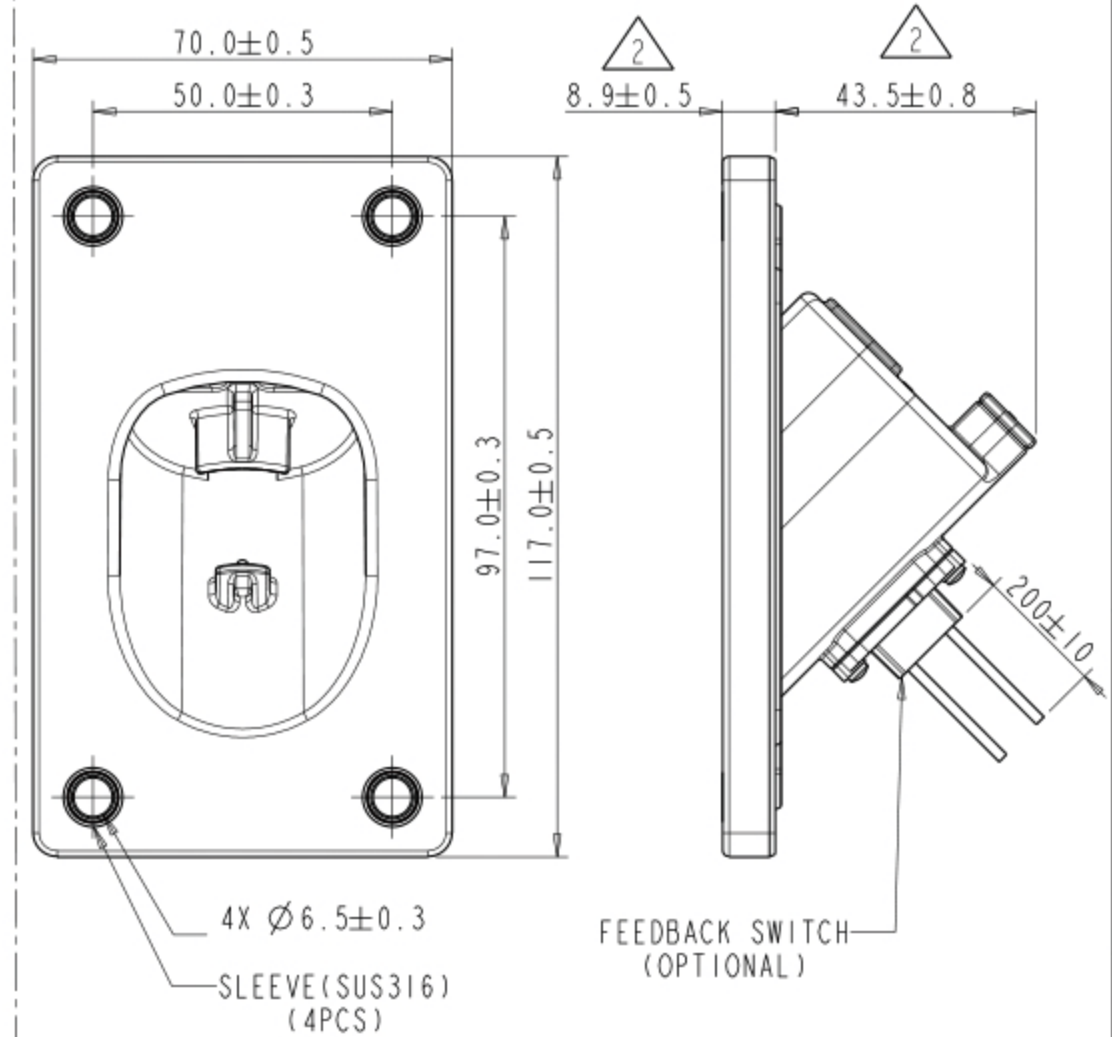

P02B000588XX

0:WITHOUT FEEDBACK SWITCH
1:WITH FEEDBACK SWITCH

1:M6 NUT
2:SLEEVE

+ CRITICAL CHARACTERISTICS 关键特性
◎ IMPORTANT CHARACTERISTICS 重要特性

TECHNICAL DATA

DURABILITY	10000 CYCLES	◎
WATERPROOF	IP 67	+
OPERATING TEMPERATURE	-40 TO 85°C	
RoHS & REACH	YES	+

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol PCD Shenzhen		TITLE			
ANSI Y14.5M	.X ±0.5		ENGR		HOUSING OF THE PLUG HOLDER			
UNITS: MM	.XX ±0.05		Jan-27-2024					
Pro/E FILE	ANGLES ±2°							
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF Amphenol PCD Shenzhen Co. Ltd Amphenol PCD Shenzhen Co. Ltd RESERVES THE RIGHT TO CLARIFY THIS DRAWING		CHKD	SIZE		DWG NO.		REV
				A3		C-P02B000588XX		2
			APPD					
					SCALE: 4:5		SHEET 1 OF 1	